

SoundBlaster Live 5.1/Audigy/Audigy 2 Toslink In Adapter

Installation Instructions




Prerequisites

- SoundBlaster Live 5.1 comes in many variations. The basic requirement here is the **AUD_EXT** connector.
- SoundBlaster Audigy also requires the **AUD_EXT** connector.
- SoundBlaster Audigy 2 requires the **AD_EXT** connector. NOTE: the VALUE version does not have this connector. And the Jumped needs the Resistor Removed.

SoundBlaster Live 5.1/Audigy cards

Connect wires as follows

Wire	Pin
RED	1
WHITE	15
BLACK	16
JUMPER	2 & 23

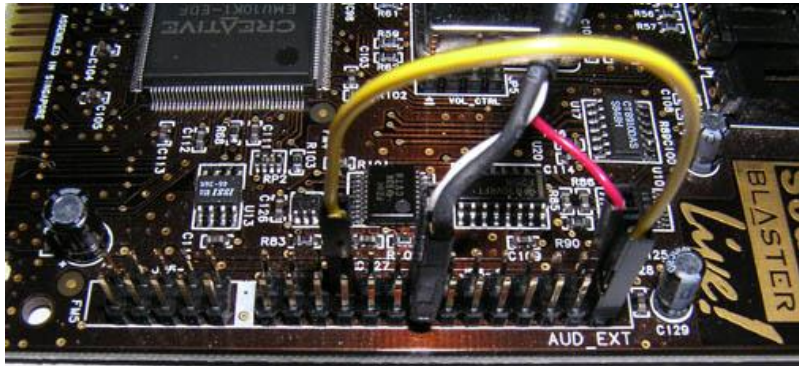

SoundBlaster Audigy 2 cards

Connect wires as follows

Wire	Pin
RED	1
WHITE	5
BLACK	6
JUMPER	25 & 35 (without resistor)

